

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G03F 7/20	A1	(11) International Publication Number: WO 97/11411 (43) International Publication Date: 27 March 1997 (27.03.97)
(21) International Application Number: PCT/IB96/00971 (22) International Filing Date: 3 September 1996 (03.09.96) (30) Priority Data: 08/531,767 21 September 1995 (21.09.95) US (71) Applicants: SIEMENS AKTIENGESELLSCHAFT [DE/DE]; Wittelsbacherplatz 2, D-80333 Munich (DE). KABUSHIKI KAISHA TOSHIBA [JP/JP]; 72, Horikawa-cho, Saiwai-ku, Kawasaki-shi, Kanagawa-ken 210 (JP). (72) Inventors: POSCHENRIEDER, Bernhard, L.; 10, Les Berg-eronnnettes, F-78170 La Celle-Saint-Cloud (FR). SATO, Takashi; 19C Greenhill Drive, Fishkill, NY 12523 (US). AZUMA, Tsukasa; 37F Hudson Harbor, Poughkeepsie, NY 12601 (US). (74) Agent: FUCHS, Franz-Josef, Postfach 22 13 17, D-80503 München (DE).		(81) Designated States: JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: AVOIDANCE OF PATTERN SHORTENING BY USING AN OFF AXIS ILLUMINATION WITH TWISTING DIPOLE AND POLARIZING APERTURES

(57) Abstract

A system and method of avoiding pattern shortening without resorting to generating a mask with a bias solve the direction dependent differences in exposure behavior in photolithography processes in the manufacture of semiconductor devices. Instead of designing a biased mask to solve the exposure problem, the pattern shortening effect is avoided by influencing the exposure process itself. By using an off axis illumination technique, the exposure is separated into different directions. In one embodiment, off axis illumination is applied in combination with special dipole apertures (i.e., two openings). The exposure is done in two or more parts, whereby the dipole aperture (12) is rotated between exposures. In another embodiment, off axis illumination is used in combination with special polarizer apertures. As with the first embodiment, the exposure is done in two or more parts, but in this case with differently polarized light.

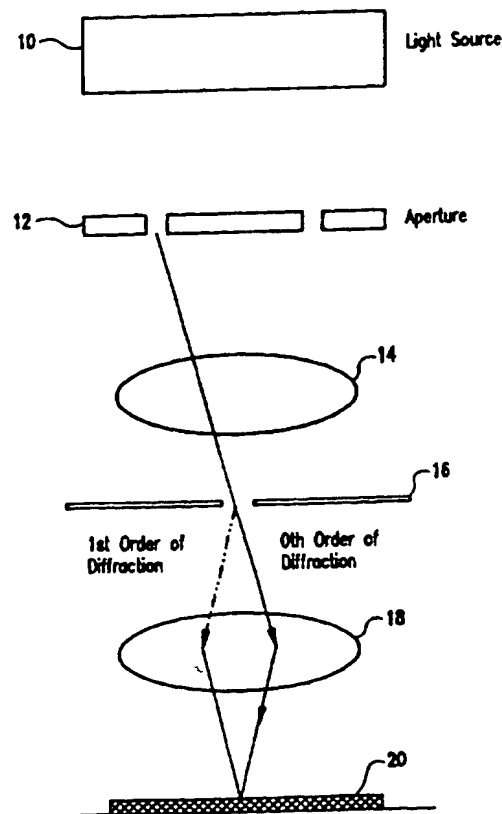

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**AVOIDANCE OF PATTERN SHORTENING
BY USING AN OFF AXIS ILLUMINATION
WITH TWISTING DIPOLE AND
POLARIZING APERTURES**

5

DESCRIPTION

BACKGROUND OF THE INVENTION

10

Field of the Invention

The present invention generally relates to the manufacture of very large scale integrated (VLSI) circuit devices and, more particularly, to the fidelity enhancement of lithographic images through the use of off axis illumination with optical twisting dipole and polarizing apertures.

20

Background Description

Manufacturing of semiconductor devices is dependent upon the accurate replication of computer aided design (CAD) generated patterns onto the surface of a device substrate. The replication process is typically performed using optical lithography followed by a variety of subtractive (etch) and additive (deposition) processes. Optical lithography patterning involves the illumination of a metallic (e.g., chrome) coated quartz plate known as a photomask which contains a magnified image of the computer generated pattern etched into the metallic layer. This illuminated image is reduced in size and patterned into a photosensitive film on the device substrate. As a result of the interference and processing effects which occur during pattern transfer, images formed on the device substrate deviate from their ideal dimensions and shape as represented by the computer images. These deviations depend on the characteristics of

the patterns as well as a variety of process conditions. Because these deviations can significantly effect the performance of the semiconductor device, many approaches have been pursued which focus on CAD compensation schemes which ensure a resultant ideal image.

The performance enhancement of advanced VLSI circuitry (that is, the speed enhancement versus dimension reduction of the circuits) is increasingly limited by the lack of pattern fidelity in a series of lithography and RIE processes at small dimensions (e.g., sub $0.5\mu\text{m}$). In the photolithography process, a pattern is transferred from a photomask to a photosensitive film (resist) on the wafer. In the RIE process, this pattern in the resist is transferred into a variety of films on the wafer substrate. After lithography, some structures show a so-called pattern shortening effect. This effect is due to the fact that the exposure process is direction dependent. This means that the exposure dose (i.e., exposure time) then has to be optimized for one direction. The other direction cannot be independently optimized. The unfortunate consequence is the above described pattern or line shortening.

An alternative to the costly development of processes with every higher effective resolution is the selective biasing of mask patterns to compensate for the pattern distortions occurring during wafer processing. The term Optical Proximity Correction (OPC) is commonly used to describe this process of selective mask biasing, even though the trend exists to include pattern distortions unrelated to the optical image transfer. The idea of biasing patterns to compensate for image transfer infidelities has been commonly applied to E-beam lithography to counteract the effects of back scattered electrons, both in the writing of photo masks and in direct wafer writing operations. See for example U.S. Patent No. 5,278,421.

OPC extends the use of the automatic pattern biasing concept to the two major pattern transfer processes used in VLSI technologies. Current implementations of OPC can be categorized as "rules-based" in which patterns are sorted and biased in the computer aided design (CAD) data set based on rules relating bias amounts to pattern attributes such as size, proximity, and density, and "convolution-based" in which CAD patterns are biased based on particular pattern environment. Both the rules and convolution functions can be generated either from process simulations or empirical data. For examples of "rules-based" OPC implementations, see Richard C. Henderson and Oberdan W. Otto, "CD data requirements for proximity effect corrections", *14th Annual BACUS Symposium on Photomask Technology and Management*, William L. Brodsky and Gilbert V. Shelden, Editors, Proc. SPIE 2322 (1994), pp.218-228, and Oberdan W. Otto, Joseph G. Garofalo, K. K. Low, Chi-Min Yuan, Richard C. Henderson, Christophe Pierrat, Robert L. Kostelak, Shiela Vaidya, and P. K. Vasudev, "Automated optical proximity correction--a rules-based approach", *Optical/Laser Microlithography VII*, Timothy A. Brunner, Editor, Proc. SPIE 2197 (1994), pp. 278-293. For examples of the "convolution-based" OPC implementations, see John P. Stirniman and Michael L. Rieger, "Fast proximity correlation with zone sampling", *Optical/Laser Microlithography VII*, Timothy A. Brunner, Editor, Proc. SPIE 2197 (1994), pp. 294-301, and John Stirniman and Michael Rieger, "Optimizing proximity correction for wafer fabrication processes", *14th Annual BACUS Symposium on Photomask Technology and Management*, William L. Brodsky and Gilbert V. Shelden, Editors, Proc. SPIE 2322 (1994), pp. 239-246. In order to compensate the direction dependent differences in exposure behavior, the associated masks are designed with a certain bias. This bias is such that, for example, the lines are designed slightly longer. There are, however, limitations to this

solution due to the limited resolution of the chrome mask writing system being used.

SUMMARY OF THE INVENTION

5

It is therefore an object of the present invention to provide a system and method of avoiding pattern shortening without resorting to generating a mask with a bias to solve the direction dependent differences in exposure behavior in photolithography processes.

According to the invention, instead of designing a biased mask to solve the exposure problem, the pattern shortening effect is avoided by influencing the exposure process itself. Currently, all directions are exposed to the light for the same time (i.e., the total exposure time). By using an off axis illumination technique, it is possible to separate the exposure in different directions. More specifically, the problem of pattern shortening is solved according to one embodiment of the invention by applying the off axis illumination technique in combination with special dipole apertures (i.e., two openings). The exposure is done in two or more parts, whereby the aperture is twisted by, say, 90° between two exposures. According to another embodiment of the invention, the off axis illumination technique is used in combination with special polarizer apertures. As with the first embodiment, the exposure is done in two or more parts, but in this case with differently polarized light.

30

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, aspects and advantages will be better understood from the following detailed description of a preferred embodiment of the invention with reference to the drawings, in which:

Figure 1 is a schematic diagram showing the arrangement of an off axis illumination photolithography

system as used in the practice of the invention according to a first embodiment;

Figures 2A and 2B are plan views of standard apertures used in conventional off axis illumination photolithography systems;

Figures 3A and 3B are plan views of twisting dipole apertures used in the off axis illumination photolithography system of Figure 1 according to a first embodiment of the invention;

Figure 4 is a schematic diagram showing the arrangement of an off axis illumination photolithography system as used in the practice of the invention according to a second embodiment; and

Figures 5A and 5B are plan views of polarizing apertures used in the off axis illumination photolithography system of Figure 1 according to a second embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS OF THE INVENTION

Referring now to the drawings, and more particularly to Figure 1, there is shown a schematic diagram of an off axis illumination photolithography system. A light source 10 illuminates an aperture plate 12. Light passing through the aperture plate 12 is focused by lens system 14 onto a mask 16 having small dimensions relative to the wavelength of the illuminating light such as to produce a diffraction pattern. The mask 16 is typically an etched chrome pattern on quartz. The 0th and 1st order diffraction components of the light passed by the mask 16 is, in turn, focused by lens system 18 onto a target 20, such as a substrate coated with a photosensitive film.

The aperture plate 12 in a conventional off axis illumination photolithographic system typically takes the form of the aperture plates shown in Figures 2A and 2B. The aperture plate in Figure 2A is characterized by four

off-center circular apertures located 90° apart about the center of the aperture plate. The aperture plate in Figure 2B is characterized by four pie-shaped holes with the center section occluded. Using either of these
5 aperture plates in an off-axis illumination photolithographic system such as shown in Figure 1 limits the control of the illumination. That is, the exposure process is direction dependent, and it is only possible to optimize the exposure dose (i.e., exposure time) for
10 only one direction.

According to the invention, the exposure process is separated into two directions, allowing for optimization of the exposure dose in each of the two directions. In the first embodiment of the invention, aperture plates as
15 shown in Figures 3A and 3B are used. These plates are characterized by having apertures only along one axis (i.e., diameter), the apertures along the perpendicular axis as shown in Figures 2A and 2B, respectively, being eliminated. The aperture plates shown in Figures 3A and
20 3B are referred to herein as a dipole aperture plate. By using these dipole aperture plates, it is now possible to expose one direction for a different time than another. For example, one direction could be exposed for 40% and the perpendicular direction for 60% of the total exposure
25 time. These different exposure directions can be separated by twisting the dipole aperture plate by 90° between each of the two exposure doses.

It is also possible to separate the exposure dose into more than two directions. This can be done, for
30 example, by twisting the aperture dipole less than 90° between each dose. In addition, the aperture dipole plate can be rotated with a nonconstant angular velocity tailored to the desired dose compensation.

According to a second embodiment of the invention,
35 similar dose compensation can be accomplished using polarizers, as generally shown in Figures 4 and 5A and 5B. In Figure 4, the structure shown is generally the

same as that shown in Figure 1 and like reference numerals designate the same or similar elements. A polarizer 22 is added between the light source 10 and the aperture plate 12. The aperture plate 12 takes the form of one of the aperture plates shown in Figures 5A or 5B. These aperture plates are similar to the aperture plates shown in Figures 2A and 2B except that the apertures are filled with polarizing films. The polarizations of the films in the apertures on one axis are perpendicular to the polarizations of the films in the apertures on the perpendicular axis.

Using the arrangement shown in Figures 4 and 5A or 5B, it is again possible to expose one direction for a different time than another. These different exposure directions are separate by applying the two exposure steps with two differently polarized lights. As in the first embodiment, it is also possible to separate the exposure into more than two directions using similar techniques.

While the invention has been described in terms of two preferred embodiments, those skilled in the art will recognize that the invention can be practiced with modification within the spirit and scope of the appended claims.

25

CLAIMS

Having thus described our invention, what we claim
is new and desire to secure by Letters Patent is as
5 follows:

1. An off axis illumination system for photolithographic
exposure of a photosensitive film on a device substrate
in the manufacture of semiconductor devices comprising:
10 a source of light for exposing the photosensitive
film;
a photomask which contains a magnified image of
pattern etched into a metallic layer, said photomask
being interposed between the source of light and the
15 photosensitive film to be exposed;
a lens system between the photomask and the resist
for reducing the size of an illuminated image for
patterning into the photosensitive film on the device
substrate; and
20 an aperture plate positioned between the source of
light and the photomask, said aperture plate allowing the
off axis exposure of the photosensitive film to be
separated into two or more exposures, each exposure being
separately optimized to avoid pattern shortening in a
25 projected image of the photomask on the photosensitive
film.

2. The off axis illumination system for photolithographic
exposure of a photosensitive film on a device substrate
30 in the manufacture of semiconductor devices as recited in
claim 1 wherein said aperture plate is a dipole apertur
plate having two off center apertures on a common axis,
said aperture plate being rotated between exposure doses
to separate the exposure of the photosensitiv film into
35 two or more exposures.

3. The off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate in the manufacture of semiconductor devices as recited in claim 2 wherein said aperture plate is characterized by
5 two circular off center apertures.

4. The off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate in the manufacture of semiconductor devices as recited in
10 claim 2 wherein said aperture plate is characterized by two generally pie shaped off center apertures.

5. The off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate
15 in the manufacture of semiconductor devices as recited in claim 1 further comprising a polarizer interposed between said source of light and said aperture plate, said aperture plate having apertures filled with polarizing film, said aperture plate being rotated between exposure
20 doses to separate the exposure of the photosensitive film into two or more exposures.

6. The off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate
25 in the manufacture of semiconductor devices as recited in claim 5 wherein said aperture plate is characterized by off center apertures on two mutually perpendicular axes, polarizations of films of said apertures on said two axes being mutually perpendicular.

30

7. A method of avoiding pattern shortening in an off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate in the manufacture of semiconductor devices comprising the steps
35 of:

providing a source of light for exposing the photosensitive film;

interposing a photomask which contains a magnified image of pattern etched into a metallic layer between the source of light and the photosensitive film to be exposed;

5 reducing the size of an illuminated image for patterning into the photosensitive film on the device substrate;

 positioning an aperture plate between the source of light and the photomask; and

10 separating the off axis exposure of the photosensitive film into two or more exposures by rotating the aperture plate between exposures, each exposure being separately optimized to avoid pattern shortening in a projected image of the photomask on the
15 photosensitive film.

8. The method of avoiding pattern shortening in an off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate in the
20 manufacture of semiconductor devices as recited in claim 7 wherein the aperture plate is a dipole aperture plate having two off center apertures on a common axis, said aperture plate being rotated between exposure doses to separate the exposure of the photosensitive film into two
25 or more exposures.

9. The method of avoiding pattern shortening in an off axis illumination system for photolithographic exposure of a photosensitive film on a device substrate in the
30 manufacture of semiconductor devices as recited in claim 7 further comprising the step of interposing a polarizer between said source of light and said aperture plate, said aperture plate having apertures filled with polarizing film, said aperture plate being rotated
35 between exposure doses to separate the exposure of the photosensitive film into two or more exposures.

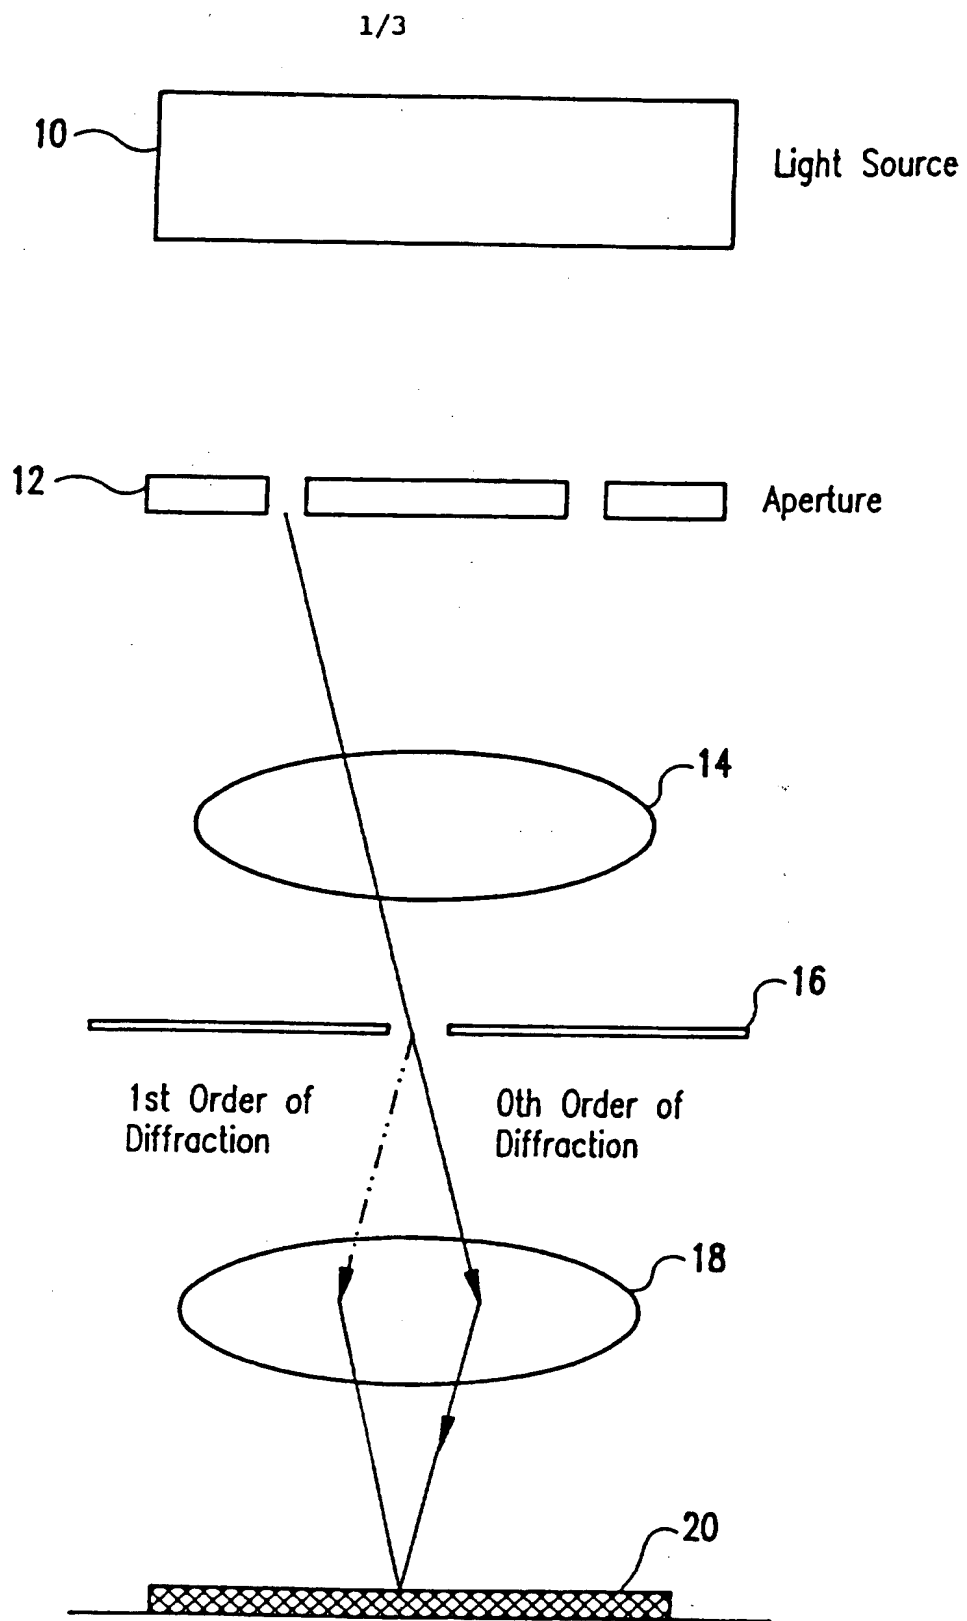


FIG. 1

SUBSTITUTE SHEET (RULE 26)

2/3




FIG. 2A
PRIOR ART




FIG. 2B
PRIOR ART




FIG. 3A




FIG. 3B

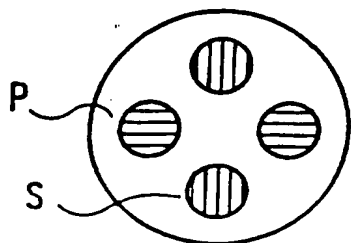


FIG. 5A

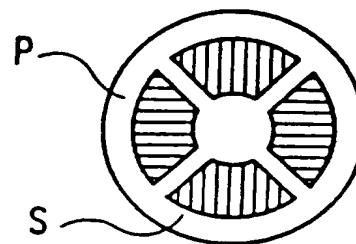


FIG. 5B

3/3

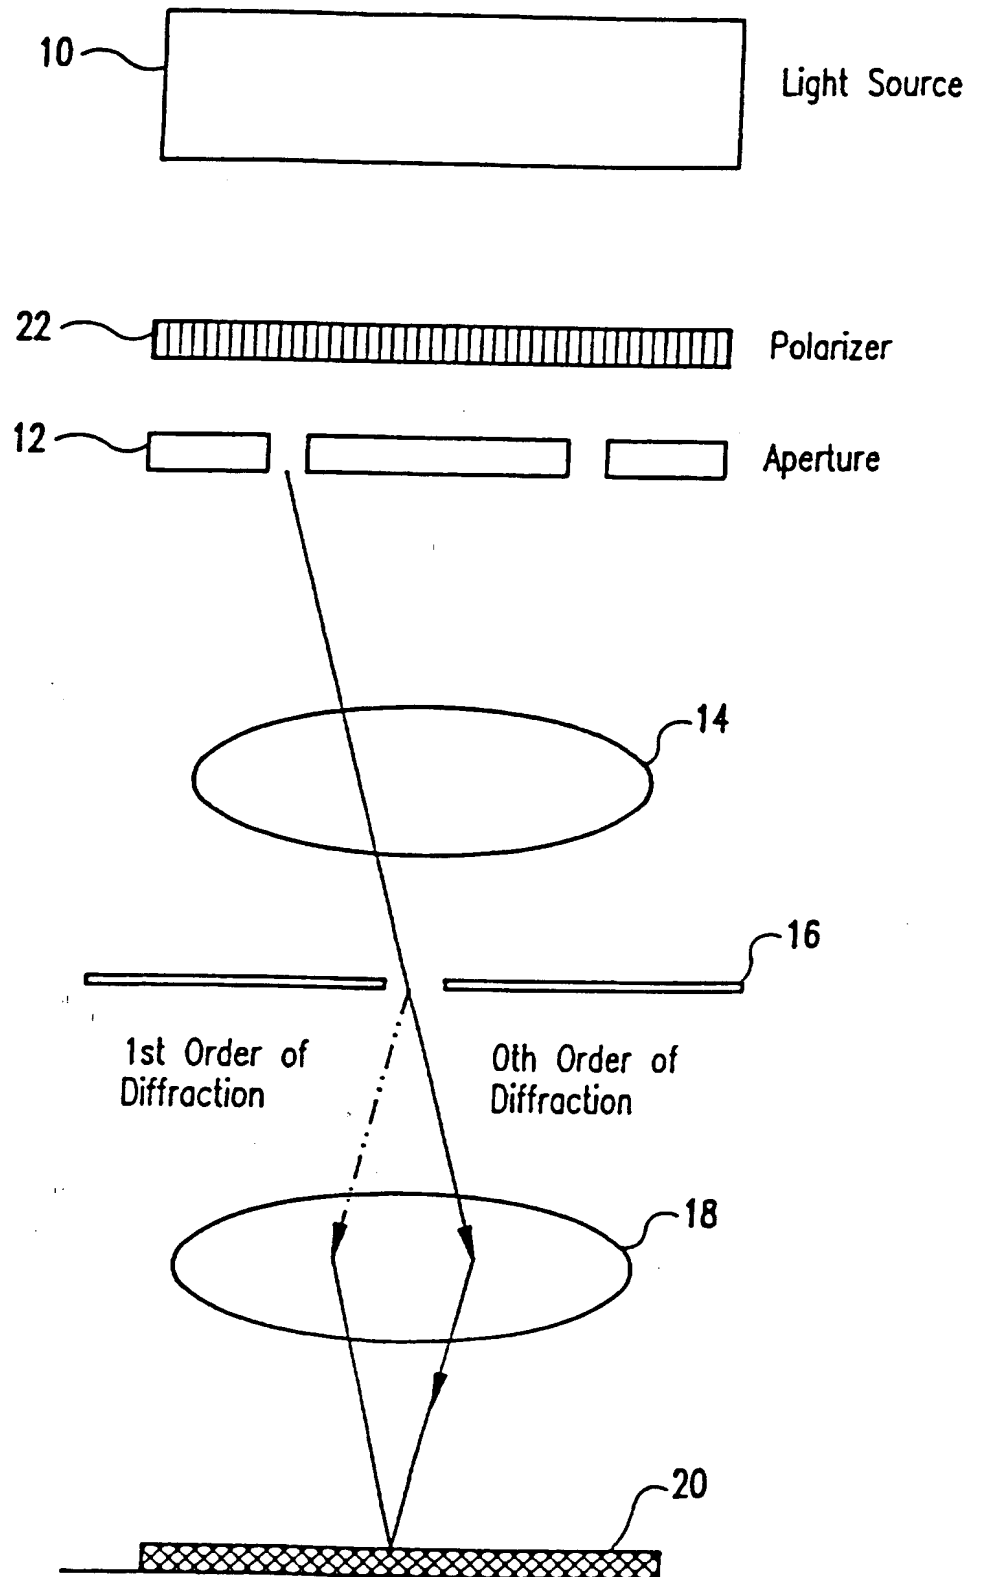


FIG.4

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No
PLT/IB 96/00971

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G03F7/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 573 281 A (FUJITSU LTD) 8 December 1993 see page 17, line 20 - line 46; figures 35,36,44 see page 23, line 25 - page 24, line 39; figures 59-62	1-5
A	---	6,7
A	JP 06 252 021 A (NEC CORP) 9 September 1994 see figures 7,8 & US 5 476 736 A (TANABE HIROYOSHI) 19 December 1995 see column 5, line 15 - line 32; figures 3,5 -----	4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

- * "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- * "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- * "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * "&" document member of the same patent family

Date of the actual completion of the international search

18 December 1996

Date of mailing of the international search report

27.12.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Heryet, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 96/00971

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0573281	08-12-93	JP-A- 6275493	30-09-94
		JP-A- 5335213	17-12-93
		JP-A- 5335214	17-12-93
		JP-A- 6005489	14-01-94
		JP-A- 6120119	28-04-94
		US-A- 5465220	07-11-95
JP-A-06252021	09-09-94	US-A- 5476736	19-12-95

